

Intelligent Display Solutions

Enabling Versatile Applications

- ／ Core Values
- ／ Design-in Services
- ／ Vertical Focused Solutions
- ／ Product Selection



ADVANTECH


Enabling an Intelligent Planet

www.advantech.com

Intelligent Display Solutions

According to a recent market research, the global display applications market is expected to reach USD 164.24 billion by 2017. What's more, IHS research also projected, in 2017, there will be a CAGR revenue of 10% for Intelligent Systems with integrated displays, representing a huge opportunity. The potential is immense and the opportunities are everywhere.

Advantech provides a wide range of reliable LCD solutions to fulfill those versatile market needs. Our display solutions range from 5.7" to 55", and from 200 nits to 2000 nits, with customized touch integration. Equipped with streamlined design-in services and vertical market focused solutions, Advantech meets customers' requirements and reduces time-to-market and development cost.

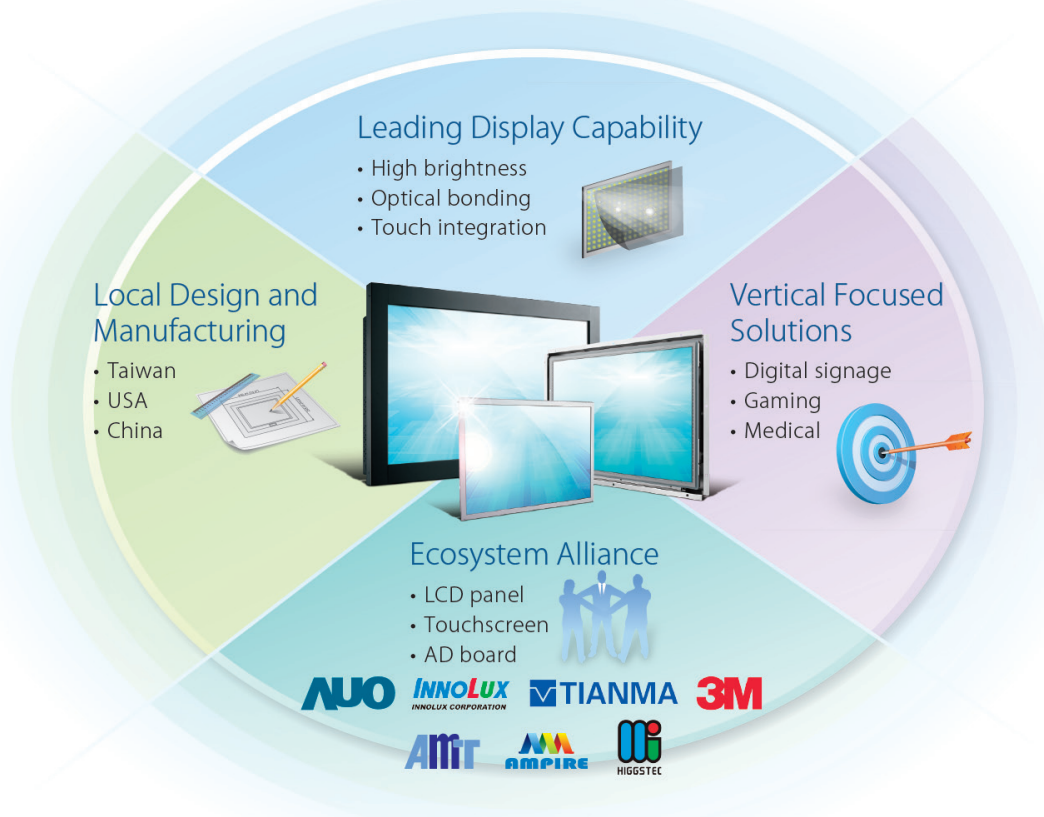

Product Line-up

Industrial LCD Panels



IDK-1000 Series

- 5.7"~21.5" size options
- Indoor applications
- LVDS signal interface

Ultra High Brightness LCDs



IDK-2000 Series

- 8.4"~31.5" size options
- Outdoor applications
- LVDS signal interface

Open Frame Monitors



IDS-3100 Series

- 6.5"~21.5" size options
- DVI/VGA interface
- Rear/VESA mount

Panel Mount Monitors



IDS-3200 Series

- 10.4", 15" size options
- DVI/VGA interface
- Front/VESA mount

Digital Signage Displays



DSD-3000 Series

- 32", 42", 55" size options
- VGA/HDMI/DP interface
- Wall mount

Stretched Signage Displays



DSD-5000 Series

- 28"(16:3), 38"(16:4.5) size options
- DVI/VGA interface
- Wall mount

Guaranteed for Time-to-Market

With Advantech, customers are provided with a total services package—from solution consulting, design, integration, and mass production to follow-up service and support. Through one point of contact, customers benefit from a complete product portfolio, flexible customization, the highest quality and local support. Advantech display service team actively helps customer ease the design process and achieve faster time-to-market with four dedicated services.



Solution Consulting Service | 5-Day Solution Delivery

At the early consulting stage, Advantech intelligent display service team provides various solutions regarding technical specifications, price, and scheduling which from a display integration stance, customers are most concerned about. As your valuable asset partner, Advantech delivers a solution proposal within 5 days to give your project a head-start.

- Excellent display, touch and thermal solutions
- LCD & SBC compatibility
- Complete product offering



Design and Integration Service | 4-Week Sample Delivery

Equipped with leading LCD technologies and knowledge, Advantech provides a variety of flexible customization services. Moreover, Advantech delivers samples within a timely duration of just 4 weeks.

Customization Items:

- Mechanical Design:
 - IP65, open frame, panel mount
- Touch Solution:
 - resistive, projective capacitive, surface capacitive, SAW
- Optical Enhancement:
 - optical bonding, high brightness, AR film
- Display Integration:
 - cable assembly, VBIOS configuration



Manufacturing Service | 6-Week Mass Production

Advantech owns clean rooms in Taiwan, USA, and China and is capable of taking full control of quality management from initial design concepts to mass production. Throughout the production process, all the displays must pass multiple reliability tests. Only then can they be delivered via our global logistic support network.




Customer Support Service | 5-Year Extended Warranty

To ensure your long term project success, Advantech offers a 3-year longevity support and 5-year extended warranty portfolio. We also provide LCD repair service and local technical support.

Designed for Vertical Market Success

Other than general-purpose applications, and with years of vertical market expertise, Advantech offers niche display solutions tailored to specific vertical markets such as Digital Signage, Medical and Gaming to better meet customers' needs. With our highly integrated and dedicated support, customers can focus and maximize their value on vertical market development.

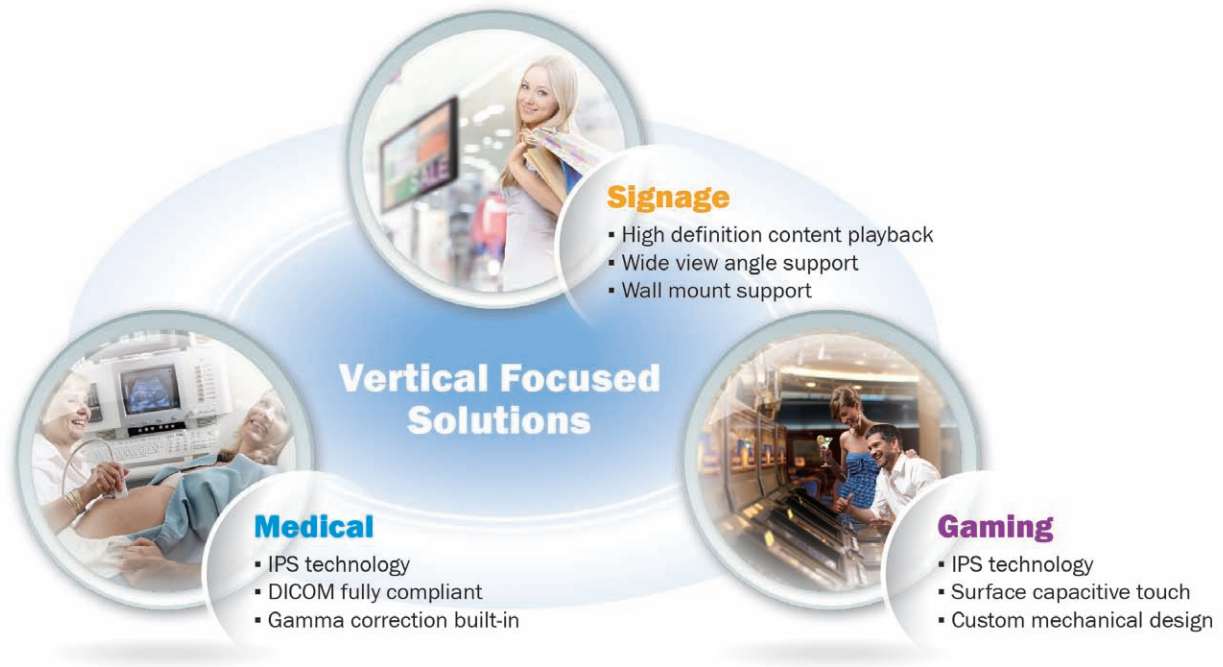

Digital Signage Displays



Advantech digital signage displays are not only attractive, but reliable enough to withstand the consistent interactivity inherent in public access venues. Our solutions include large format professional monitors and innovative stretched displays which both can be easily integrated with Advantech signage players. All of our solutions are featured with ultra wide viewing angles of 178°/178° and high contrast ratio to deliver optimized video or image content.

Applications:

Retail, e-Bulletin, transportation, restaurant



Touch Screen



Wide View Angle



High Brightness



DSD-3000 Series

Large Format Signage Displays

- 32", 42", 55" size options
- Ultra thin bezel design
- VGA/HDMI/DisplayPort interface
- Optical touch screen solution



DSD-5000 Series

Stretched Signage Displays

- 28", 38" size options
- High brightness
- Ultra wide ratio
- DVI/VGA interface

Medical Solutions



Medical imaging applications require highly consistent image reproduction. Advantech provides sophisticated medical display solutions that can help improve performance and diagnostic accuracy through medical imaging systems. Our solutions cover panels, AD boards and open frame monitors with color management functions which help improve brightness stability, gray scale, color temperature and color gamut. All of our displays are designed with IPS technology which offers superior color accuracy. Most important of all, our solution is fully compliant with the DICOM standard for image communication and image file formats.

Applications:

Ultrasound, clinical and surgical applications



IDK-1000MD Series LCD Kit and an AD Board

- 15", 19" size options
- VGA / DVI interface
- DICOM compliant
- Gamma level adjustable to 72% NTSC



IDS-3100MD Series Medical Open Frame Monitors

- 15", 19" size options
- VGA / DVI interface
- DICOM compliant
- Gamma level adjustable to 72% NTSC


Gaming Solutions



Designed exclusively for gaming applications, our gaming display solutions provide a wide range of gaming monitors to meet the special requirements of applications such as slot machines and casinos. Our solutions include open frame monitors and stretched displays. These display solutions feature widescreens, reliable touch screens and flexible mechanical designs that can be integrated with Advantech gaming platforms for a total gaming solution.

Applications:

Slot machine, lottery terminals, jackpot systems

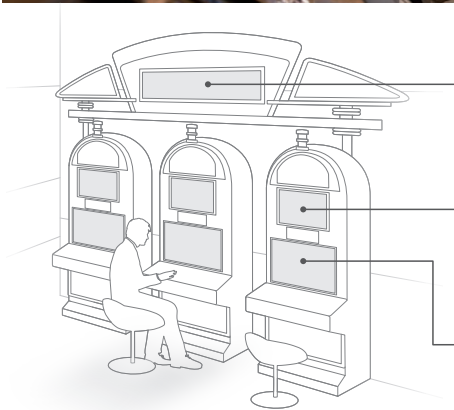

Player Tracking Display/Signage DSD-5000 Series

- 28", 38" screen size options
- Optional protection glass with thickness of 3~9mm
- DVI/VGA interface

Top Display/Main Display IDS-3100GD Series

- 19", 21.5", 23" size options
- Optional touchscreen: Surface Capacitive, Projected Capacitive, Infra Red, SAW, Optical Touch
- Optional protection glass with thickness of 1.1~5mm
- HDMI/DVI/VGA interface

Product Selection

Industrial Display Kits IDK-1000 Series



Model	IDK-1105	IDK-065	IDK-1107	IDK-1108	IDK-1110	IDK-1112	IDK-1115	IDK-1117	IDK-1119	IDK-1121
Size	5.7"	6.5"	7"	8.4"	10.4"	12.1	15"	17"	19"	21"
Resolution	640 x 480	640 x 480	1024 x 600	800 x 600	800 x 600	800 x 600	1024 x 768	1280 x 1024	1280 x 1024	1920 x 1080
Brightness	500 nits	800 nits	500 nits	450 nits	400 nits	450 nits	400 nits	350 nits	350 nits	300 nits
Contrast Ratio	250:1	600:1	700:1	600:1	700:1	700:1	700:1	800:1	1000:1	5000:1
Viewing Angle (U/D/L/R)	50°/50°/70°/70°	70°/70°/80°/80°	75°/75°/75°/75°	80°/60°/80°/80°	60°/80°/80°/80°	65°/75°/80°/80°	70°/70°/80°/80°	80°/80°/85°/85°	80°/80°/85°/85°	89°/89°/89°/89°
Signal Interface	1 channel LVDS	1 channel LVDS	1 channel LVDS	1 channel LVDS	1 channel LVDS	1 channel LVDS	1 channel LVDS	2 channel LVDS	2 channel LVDS	2 channel LVDS
Touchscreen	4W resistive	4W resistive	4W resistive	4W resistive	4W resistive	5W resistive	5W resistive	5W resistive	5W resistive	5W resistive
LED Backlight MTBF	30K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs
Operating Temperature	-20~70 °C	-10~60 °C	-20~70 °C	-10~60 °C	-10~60 °C	-20~70 °C	-20~70 °C	0~50 °C	0~50 °C	0~60 °C
Outline Dimension (mm)	127 x 98.43 x 9.1	153 x 120 x 13.2	165.5 x 104.44 x 10.52	203 x 142.6 x 10.3	243 x 184 x 10.6	276 x 209 x 11.3	326.5 x 253.5 x 14.4	358 x 296.5 x 14.6	396 x 324 x 21.7	495.6 x 292.2 x 20.75

High Brightness Display Kits IDK-2000 Series (Outdoor Applications)



Model	IDK-2108	IDK-2110	IDK-2112	IDK-2115	IDK-2117	IDK-2119	IDK-2121	IDK-2132
Size	8.4"	10.4"	12.1"	15"	17"	19"	21.5"	31.5"
Resolution	800 x 600	800 x 600	800 x 600	1024 x 768	1280 x 1024	1280 x 1024	1920 x 1080	1920 x 1080
Brightness	1200 nits	1200 nits	1200 nits	1200 nits	1200 nits	1200 nits	1200 nits	2000 nits
Contrast Ratio	600:1	500:1	700:1	700:1	1000:1	1000:1	5000:1	3000:1
Viewing Angle (U/D/L/R)	80°/60°/80°/80°	60°/70°/80°/80°	65°/75°/80°/80°	70°/60°/80°/80°	80°/80°/85°/85°	80°/80°/85°/85°	89°/89°/89°/89°	89°/89°/89°/89°
Signal Interface	1 channel LVDS	1 channel LVDS	1 channel LVDS	1 channel LVDS	2 channel LVDS	2 channel LVDS	2 channel LVDS	1 channel LVDS
Touchscreen (Optional)	4W resistive	4W resistive	5W resistive	5W resistive	5W resistive	5W resistive	5W resistive	-
LED Backlight MTBF	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs
Operating Temperature	-20~70 °C	-20~70 °C	-20~70 °C	-20~70 °C	0~50 °C	0~50 °C	0~60 °C	0~50 °C
Outline Dimension (mm)	203.0 x 142.5 x 8.0	236.0 x 176.9 x 5.7	279 x 209.0 x 9.0	326.5 x 253.5 x 11.5	358.5 x 296.5 x 16.65	396 x 324 x 18.65	495.6 x 292.2 x 17.7	727.4 x 429 x 26

Slim Open Frame Monitors IDS-3100 Series



Model	IDS-3106	IDS-3110	IDS-3112	IDS-3115	IDS-3117	IDS-3119	IDS-3121W
Size	6.5"	10.4"	12.1"	15"	17"	19"	21.5"
Resolution	640 x 480	800 x 600	800 x 600	1024 x 768	1280 x 1024	1280 x 1024	1920 x 1080
Brightness	800 nits	400 nits	450 nits	400 nits	350 nits	350 nits	300 nits
Contrast Ratio	600 : 1	700 : 1	700 : 1	700 : 1	800 : 1	1000 : 1	5000:1
Viewing Angle (U/D/L/R)	70°/70°/80°/80°	60°/80°/80°/80°	65°/75°/80°/80°	70°/70°/80°/80°	80°/80°/85°/85°	80°/80°/85°/85°	89°/89°/89°/89°
Signal Interface	DVI/VGA	DVI/VGA	DVI/VGA	DVI/VGA	DVI/VGA	DVI/VGA	DVI/VGA
Touchscreen (Optional)	4W resistive	5W resistive	5W resistive	5W resistive	5W resistive	5W resistive	5W resistive
LED Backlight MTBF	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs	50K hrs
Operating Temperature	0~50 °C	-20~60 °C	-20~60 °C	-20~60 °C	-20~60 °C	0~45 °C	0~55 °C
Outline Dimension (mm)	215 x 160 x 32.1	279.4 x 220 x 30	320.2 x 252 x 30.7	362 x 288 x 32.8	400 x 344.7 x 33.4	438 x 369.7 x 34.3	546.6 x 295.2 x 46



Panel Mount Monitors IDS-3200 Series

Model	IDS-3210	IDS-3215
Size	10.4"	15"
Resolution	800 x 600	1024 x 768
Brightness	400	400
Contrast Ratio	700 : 1	700:1
Viewing Angle (U/D/L/R)	60°/80°/80°/80°	70°/70°/80°/80°
Signal Interface	DVI/VGA	DVI/VGA
Touchscreen (Optional)	5W resistive	5W resistive
LED Backlight MTBF	50K hrs	50K hrs
Operating Temperature	-20~60 °C	-20~60 °C
Outline Dimension(mm)	290.2 x 237.64 x 35.1	365 x 291 x 38



Digital Signage Displays DSD-3000 Series

Model	DSD-3032	DSD-3042	DSD-3055
Size	32"	42"	55"
Resolution	1920 x 1080	1920 x 1080	1920 x 1080
Brightness	350 nits	500 nits	450 nits
Contrast Ratio	3000 : 1	4000:1	4000:1
Viewing Angle (U/D/L/R)	89°/89°/89°/89°	89°/89°/89°/89°	89°/89°/89°/89°
Signal Interface	VGA / HDMI / Display Port	VGA / HDMI / Display Port	VGA / HDMI / Display Port
Touchscreen (Optional)	Optical touch	Optical touch	Optical touch
LED Backlight MTBF	50K hrs	50K hrs	60K hrs
Operating Temperature	5 ~ 45 °C	5 ~ 45 °C	5 ~ 45 °C
Outline Dimension(mm)	743.6 x 438.1 x 73	961 x 555 x 72.7	1238.6 x 709.4 x 72.5



Stretched Signage Displays DSD-5000 Series

Model	DSD-5028	DSD-5038
Size	28" (16:3)	38" (16:4.5)
Resolution	1920 x 358	1920 x 538
Brightness	700 nits	800 nits
Contrast Ratio	3000 :1	4000 : 1
Viewing Angle (U/D/L/R)	89°/89°/89°/89°	88°/88°/88°/88°
Signal Interface	DVI/VGA	DVI/VGA
LED Backlight MTBF	50K hrs	50K hrs
Operating Temperature	0 ~45 °C	0 ~45 °C
Outline Dimension (mm)	736.6 x 167.3 x 43.6	980.9 x 303.2 x 44

Advantech Global Services and Support



Industrial grade products at competitive cost



Strict revision control and design reliability



Global logistics and RMA services with local support



Product longevity up to 3-5 years and superior warranty/service options



Customized embedded OS and BIOS services



Partnership with multiple software companies

Regional Service & Customization Centers

China

Kunshan
86-512-5777-5666

Taiwan

Taipei
886-2-2792-7818

Netherlands

Eindhoven
31-40-267-7000

Poland

Warsaw
48-22-33-23-740 / 741

USA

Milpitas, CA
1-408-519-3898

Worldwide Offices

Greater China

China 800-810-0345
Beijing 86-10-6298-4346
Shanghai 86-21-3632-1616
Shenzhen 86-755-8212-4222
Chengdu 86-28-8545-0198
Hong Kong 852-2720-5118

Taiwan 0800-777-111
Rueiguang 886-2-2792-7818
Yang Guang 886-2-2792-7818
Xindian 886-2-2218-4567
Taichung 886-4-2378-6250
Kaohsiung 886-7-229-3600

Asia Pacific

Japan 0800-500-1055
Tokyo 81-3-6802-1021
Osaka 81-6-6267-1887

Korea 080-363-9494
Seoul 82-2-3663-9494

Singapore
Singapore 65-6442-1000

Malaysia 1800-88-1809
Kuala Lumpur 60-3-7724-3555
Penang 60-4-397-3788
60-4-397-4188

Indonesia
Jakarta 62-21-769-0525

Thailand
Bangkok 66-2-248-3140

India 1800-425-5070
Bangalore 91-80-25450206

Australia 1300-308-531
Melbourne 61-3-9797-0100
Sydney 61-2-9476-9300

Europe

Europe 00800-2426-8080

Germany
Münich 49-89-12599-0
Hilden 49-2103-97-885-0

France
Paris 33-1-4119-4666

Italy
Milano 39-02-9544-961

Benelux & Nordics
Breda 31-76-5233-100

UK
Reading 44-0118-929-4540

Poland
Warsaw 48-22-33-23-740/741

Russia 8-800-555-01-50
Moscow 7-495-232-1692

Americas

North America 1-800-866-6008
1-888-576-9668
1-513-742-8895
Cincinnati 1-408-519-3898
Milpitas 1-949-420-2500
Irvine

South America
Mexico 52-55-6275-2777

Brazil 0800-770-5355
São Paulo 55-11-5592-5355

ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before ordering. This guide is intended for reference purposes only.

All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.

© Advantech Co., Ltd. 2013

860000058